


Platinum Resistance Temperature Detector

SMD 1206 (V)

The PRTD SMD 1206 is designed for automatic mounting in large volume applications on printed circuit boards where long time stability, interchangeability combined with low costs are important.

Nominal Resistance R0	Tolerance DIN EN 60751 1996-07	Tolerance DIN EN 60751 2009-05	Order Number Plastic Box
100 Ohm at 0°C	Klasse B Klasse 2B	F 0.3 F 0.6	32 207 590 32 207 589
1000 Ohm at 0°C	Class B Class 2B	F 0.3 F 0.6	32 207 595 32 207 594

Specification	DIN EN 60751 (according to IEC 751)
Temperature range	-50°C to +130°C (Possible working temperatures using volume expansion aligned conductor board material: 150°C) Tolerance Class B or 2B: -50°C up to +130°C
Temperature coefficient	TCR = 3850 ppm/K
Soldering connection	End-termination galvanic tin plated with Ni-barrier layer
Long term stability	max. R ₀ -drift 0.06% after 1000 h at 130°C
Environmental conditions	unhoused for dry environments only
Insulation resistance	> 100 MΩ at 20°C; > 2 MΩ at 130°C (glass covering)
Measuring current	100Ω: 0.3 to 1.0mA 1000Ω: 0.1 to 0.3mA (self heating has to be considered)
Self heating	0.4 K/mW at 0°C
Response time	water current (v= 0.4m/s): t _{0,5} = 0.15s t _{0,9} = 0.30s air stream (v= 2m/s): t _{0,5} = 3.5s t _{0,9} = 10s
Processing instructions	face up-mounting: reflow soldering or wave soldering, e. g. double wave ≤ 8s / 235°C
Storage life	Min. 9 months (in dry environment)
Packaging	„Face-up“ in blister reel, 4000 pcs / reel
Note	Other tolerances and values of resistance are available on request.

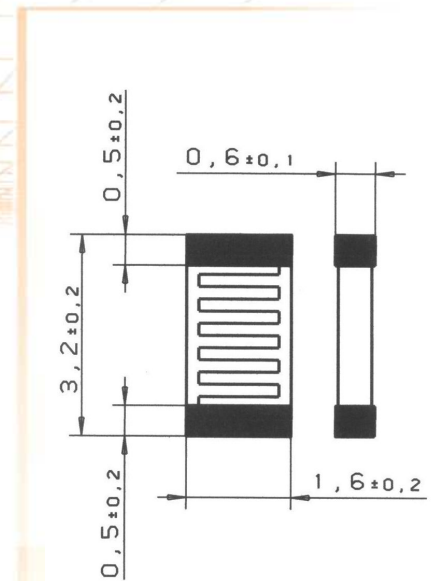

We reserve the right to make alterations and technical data printed. All technical data serves as a guideline and does not guarantee particular properties to any products.

Heraeus Sensor Technology GmbH, Reinhard- Heraeus- Ring 23, 63801 Kleinostheim, Germany
Phone: +49 (0) 6181/35-8098, Fax: +49 (0)6181/35-8101, E-Mail: info.HSND@Heraeus.com Web: www.heraeus-sensor-technology.com